


Product Information

BKT MFG 19" Outdoor Cabinet Type 18, 2000x500x1500 (width/depth/height) RAL7038 IP55

No. Card PI_110A8002_01.16

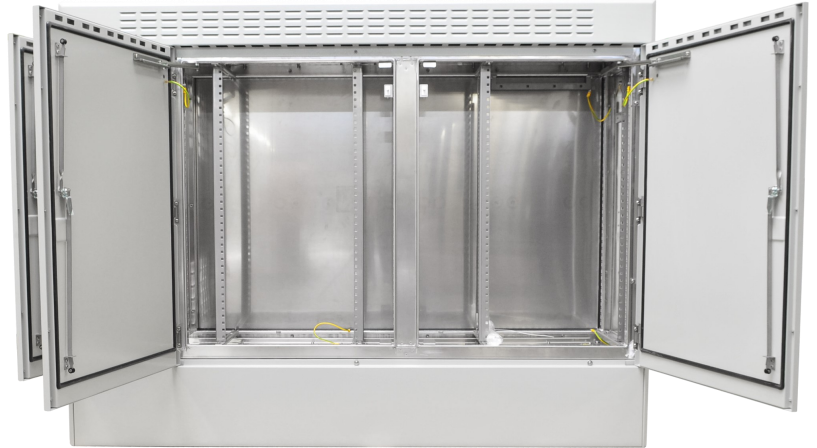

Application

- Outdoor – permanently fixed to the ground
- Protection of the mounted equipment from weather conditions and access by unauthorised persons

Standards

- PN-ETSI EN 300 019-14 V2.1.2 – Environmental condition tests, Ae – PN-EN 60068-2-1:2007 for cold tests and Be – PN-EN 60068-2-2:2007 for dry heat tests
- PN-EN 60068-2-5 - Solar radiation tests
- PN-EN ISO 11200 - Acoustic tests
- PN-E 60439-5 – Mechanical impact resistance tests
- PN-EN 60068-2-6 – Vibration tests
- PN-EN 60529 – IP rating tests
- RoHS – Restriction of the use of certain hazardous substances in electrical and electronic equipment
- EN ISO 9001:2008 – Quality management
- EN ISO 14001:2004 - Environmental management

Product Information

BKT MFG 19" Outdoor Cabinet Type 18, 2000x500x1500 (width/depth/height) RAL7038 IP55
 No. Card PI_110A8002_01.16

Construction

- Permanent positioning on an underground base fixed to the ground
- Mounting base with a battery compartment
- Transport lugs mounted in the roof

Features

- Double wall cabinet made of aluminium sheet
- Two component polyurethane gasket of the door
- Three point locking system
- RAL7038 colour
- IP55 protection degree
- IK10 mechanical impact resistance
- Stop opening doors
- Cable gland units in the floor
- Door contacts
- Vertical mounting profiles 19" 22U

Optional accessories

- 110A8102 – BKT underground plinth for 19" BKT outdoor cabinet MFG type 18, 2000/500 (W/D) RAL7038
- 10352148 – BKT heater 400 CSL-028-400W/230VAC
- 10352119 – BKT thermostat TRT-10A230V-NC, -10°C/+80°C for heaters
- 10352167 – BKT ETF 012 electronic higroterma (with thermostat) (6A,250V-NC , 0St.C/60St.C)

Performance/Variants

Type	Width (mm)	Depth (mm)	Height (mm)
MFG 18	2000	500	1500