


OBID® classic-pro

Desktop Reader ID CPR30-USB (13.56 MHz)



FEATURES

- Desktop Reader to be used in offices or at the POS
- Multi-tag Reader
- ISO 15693 & ISO 14443-A/-B
- Supports NFC Applications
- PC/SC driver

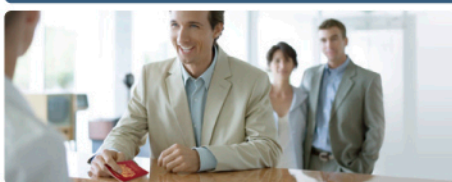



SHORT DESCRIPTION

Order description ID CPR30-USB

ID CPR30-USB is designed as a desktop device for contactless data exchange with common ISO 15693 and ISO 14443-A/B compliant transponders.

Power supply and data exchange with a computer or other equipment is carried out via the USB interface.

Delivery:

- Desktop Reader ID CPR30-USB
- USB cable (A – Mini B plug)
- Mounting instruction
- Access data for download area

PC/SC driver and OBID[®] USB driver:

- Windows[®] 2000 SP4
- Windows[®] Server 2003
- Windows[®] XP SP2
- Windows[®] Vista 32/64 Bit
- Windows[®] 7 32/64 Bit

TECHNICAL DATA

Dimensions (W x H x D)	144 mm x 84 mm x 18 mm
Housing	Plastic (ABA) / acrylic glass
Colour	white / black
Weight	about 105 g
Enclosure rating	IP 42
Operating frequency	13.56 MHz
Transmitting power	100 mW
Supply voltage	5 V, USB Bus powered
Current consumption	max. 150 mA
Supported transponders	ISO 15693, ISO 14443-A*/** ISO 14443-B**
Operation mode	Polling-Mode
Antenna	integrated
Interface	USB Full Speed (12 MBit/s)
Indicators, optical	2 LED (green / orange)
Indicators, acoustic	Buzzer, integrated
Temperature range	
Operation	-20 °C up to 60 °C
Storage	-40 °C up to 85 °C
Relative humidity	95 % (non-condensing)

* mifare[®] classic (only UID), mifare[®] UltraLight, NFC: Type 2 and Type 4 in Read/Write and NFC Card Emulation Mode

** ISO14443-4 fully supported

STANDARD CONFORMITY

Radio license	
Europe	EN 300 330
EMC	EN 301 489
Safety	
Low voltage	EN 60950
Human Exposure	EN 50364
Environment	WEEE – 2002/96/EC RoHS – 2002/95/EC

FEIG ELECTRONIC reserves the right to change specification without notice at any time.
Stand of information: January 2013.